

Water Technologies

Folded Flow[®]
Dissolved Air
Flotation
Separator

SIEMENS



Folded Flow® — The Next Generation DAF Separator

HOW THE PROCESS WORKS

The Folded Flow® dissolved air flotation (DAF) separator is a significant innovation in water and wastewater flotation technology. Simple in concept, it “folds” the flow by removing effluent from the same end of the tank as the influent is introduced. This results in a higher hydraulic loading rate.

The Folded Flow® hydraulic design takes advantage of the density gradients and currents inherent in every flotation process, and by doing so, it optimizes tank hydraulics. The result is an efficient separation process with advanced performance capabilities. The Folded Flow® DAF process works in a small footprint while maintaining the superior float concentrations and energy efficiency of the DAF process. This is the most important improvement in the DAF process since Siemens pioneered its use for oil, grease and TSS removal in the 1950's. In all DAF designs, the influent is mixed with countless micron sized air bubbles as the flow enters the tank. This

effervescent mixture is less dense than bubble free water. As a result, a “density current” is created, which tends to rise and spread quickly along the DAF surface.

In the Folded Flow® design, as the density current travels laterally, clean water, being heavier, peels away from the bottom of the density current and flows downward (See Figure 1). At the bottom of the tank, the downward flow gathers in a laminar fashion to form a horizontal return current, which accelerates as it nears the outlet.

The downward velocity of liquid from the surface layer to the return stream at the bottom is relatively constant along the length of the tank, and is uniformly close to a minimum flow. This assures that bubbles are moving upward throughout the entire volume of the tank.

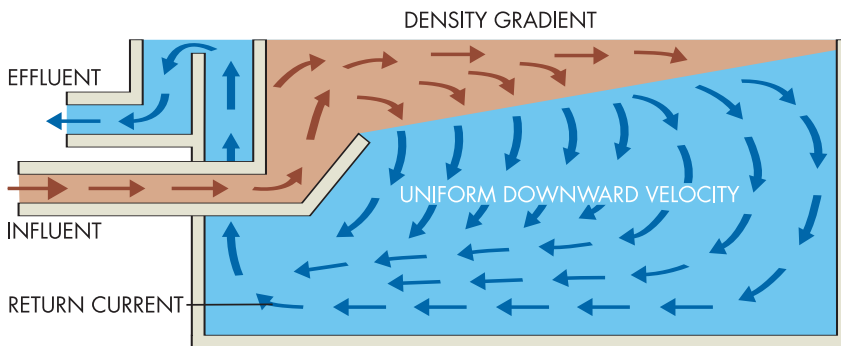


Figure 1. The Folded Flow DAF separator works with density currents to make full use of the tank's volume. This improves hydraulic detention time and effectively eliminates short circuiting.



The clear effluent, separated float and influent flow can be seen from the head end of a Folded Flow® DAF separator.

Folded Flow[®] DAF — Hydraulically Uses Entire Volume

THE PROCESS—CONTINUED

By contrast, in a typical rectangular DAF design, influent enters at one end of the tank and effluent exits the other.

With conventional designs, the density current creates a large, recirculating volume of bubble free water in the center of the separator (See Figure 2). As a result, much of the volume of the tank is underutilized and the effective time for the bubbles to remove contaminants is limited as the density current flows past the “dead” recirculating zone.

Siemens Water Technologies has performed dye tracer studies, which demonstrate the improved hydraulics of the Folded Flow[®] design. Details of the studies are available from Siemens.

COMPONENTS

Folded Flow[®] DAF separators use the same proven components found in other DAF separators designed and manufactured by Siemens Water Technologies, which is considered to be the industry standard.

In operation, a portion of the effluent is pumped to a pressurized air saturation tank where the maximum quantity of air is dissolved using an efficient vertical pressure tank.

The air saturation system conforms to rigid code requirements and has been thoroughly proven in hundreds of installations. Baffles in the air saturation tank maximize dissolution while preventing fouling. Low pressure design contributes to lower costs.

The pressurized recycle is then combined with the influent flow and enters the DAF tank in a maintenance free, non-plugging arrangement.

For strength and operating longevity, non-metallic surface and bottom chain with stainless steel or fiberglass flights run over polymeric sprockets. Drives have safety enclosures, are rated for continuous operation and are sized to start-up under worst case conditions.

Steel tanks are fabricated in our shop. Tanks can be shipped completely assembled with all components installed; or as modules. If required, the system will be supplied with flash mixing and flocculation.

As with conventional DAF separators, the selection and sizing of Folded Flow[®] DAF separators should be based upon bench testing and/or pilot studies. With a fleet of DAF separator pilot units, its own laboratory and skilled technicians, Siemens is well suited to perform these services and to ultimately offer a process guarantee.

Prior to testing, however, the following comparison chart can serve as a guideline to the strengths and weaknesses of the different separation processes.

Comparison of Air Flotation Processes			
Features	Conventional DAF	Folded Flow [®] DAF	Conventional IAF
High Overflow Rate		X	X
Small Footprint		X	X
Low Cost		X	X
Easy to Cover	X	X	X
Excellent Oil and Grease Removal	X	X	X
Excellent TSS Removal	X	X	
High Float Concentration	X	X	
Easily Handles Settled Solids	X	X	
Tolerant of Large Flow Changes	X	X	
Tolerant of Large Concentration Changes	X	X	

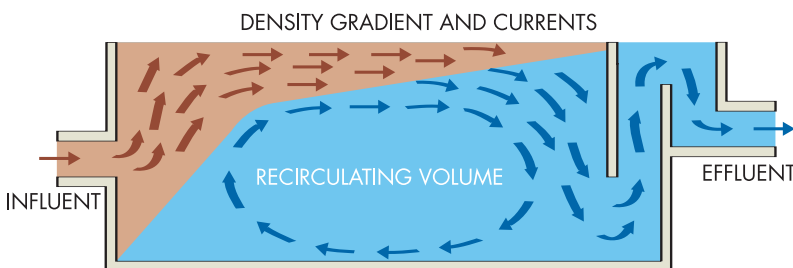


Figure 2. Density currents developed in a conventional DAF separator lead to inefficient use of available tank volume and display a greater potential for short circuiting, especially at higher than normal hydraulic loadings.



Folded Flow[®] separator pilot units are available for test purposes. This test unit is easily connected to existing plant lines and will quickly demonstrate the suitability of Float-Treat and help establish design criteria for the full scale plant.

For further information
please contact:

Siemens
Water Technologies
P. O. Box 1604
Waukesha, WI 53187
Tel: 1.262.547.0141
Fax: 1.262.547.4120
E-mail: envirexinfo.water@siemens.com
www.siemens.com/water

The information provided in this brochure contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of the contract.

Folded Flow is a trademark of Siemens, its subsidiaries or affiliates.

©2007 Siemens Water Technologies Corp.
All Rights Reserved

Order No. E10001-WTBC-A7-V1-4A00
Dispo21616 K.No.3936
EN-FFDAF-BR-0307
Subject to change without prior notice.